

4B FANG BOLTS

- Unique Design – fangs bite into belt, locking bolt in place while nut is tightened – eases fitting and removal of nut
- Large bolt head diameter = maximum resistance to pull through
- Flat bolt head – pulls fully flush into belt – reduces risk of rip out of bolt due to head protruding from back of belt
- Suitable for recessed or non recessed bolt holes
- Ideal for CC-S buckets
- Bolt torque rating dependent on bucket & belt size

4B 地脚螺栓

- 采用独特设计 在拧紧螺母时，地脚螺栓会咬入输送带，将螺栓锁定在适当位置 - 这样便于 安装和拆卸螺母
- 大螺栓头直径 = 最大限度防止 螺栓被扯出
- 平螺栓头 在拉力的作用下与 输送带完全齐平 降低因螺栓头 从输送带背部探出导致螺栓被扯 出的风险
- 适用于带有切槽或不带切槽的 螺栓孔
- 适用于 cc-s 料斗
- 螺栓额定扭矩取决于料斗和输 送带尺寸

4B EASIFIT BOLTS

4B EASIFIT 螺栓


- Supplied with small washer and nylon insert locknut
- Shank formed with hexagon tip. Special tool grips this hexagon, stopping bolt rotation while simultaneously driving the self-locking nut on (or off) in one easy operation
- Speeds fitting and removal of bolts
- Improves elevator safety
- Reduces belt damage caused by standard bolts
- UNF thread
- Bolt torque rating dependent on bucket & belt size

STEEL/ZINC PLATED/STAINLESS STEEL 316
钢/镀锌/不锈钢 316

- 随附小垫圈和尼龙插入式锁紧螺母
- 柄形，带有六角端头。在一次简单的操作中，可使用特殊工具夹紧六角端头，防止螺栓旋转，同时将自锁螺母拧上（或拧下）。
- 速度拟合与螺栓拆卸
- 提高提升机的安全性
- 减少标准螺栓对输送带造成的损坏
- 统一标准细牙螺纹
- 螺栓额定扭矩取决于 料斗和输送带尺寸



FANG/地脚

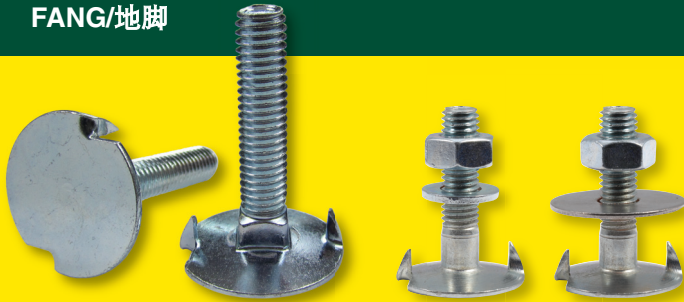

EASIFIT



4B FANG BOLTS 4B 带牙螺栓

| Ref. 参考 | Head 螺栓头 Ø (mm) | Max. Bolt Torque 最大螺栓扭矩 (Nm) | BOLT LENGTH (measured overall) 螺栓长度 (整体测量) | | | | | | |
|------------|-----------------------|------------------------------------|--|------------|------------|------------|------------|------------|------------|
| | | | 20 (mm) | 25 (mm) | 30 (mm) | 35 (mm) | 40 (mm) | 45 (mm) | 80 (mm) |
| M6 | 25 | 11 | 1.56 | 1.82 | - | - | - | - | - |
| M8 | 30 | 27 | - | 2.76 | 3.02 | - | 3.24 | - | - |
| M10 | 35 | 47 | - | - | 4.90 | 5.12 | 5.34 | 5.56 | - |

Standard zinc plated, self colour and stainless options on request 可按要求提供标准镀锌、本色或不锈钢色选项

4B EASIFIT BOLTS 4B EASIFIT 螺栓

| Ref. 参考 | Head 螺栓头 Ø (mm) | Max. Bolt Torque 最大螺栓扭矩 (Nm) | BOLT LENGTH (measured overall) 螺栓长度 (整体测量) | | | | | |
|------------|-----------------------|------------------------------------|--|-------|-------|-------|------|------|
| | | | ¾" | 1" | 1¼" | 1½" | 1¾" | 2" |
| ¼" UNF | 25 | 12 | 1.82 | 1.88* | 2.04 | - | - | - |
| ⅝" UNF | 30 | 25 | 2.84* | 3.02* | 3.24 | 3.48 | 3.68 | - |
| ⅜" UNF | 32 | 46 | - | 4.56 | 4.70* | 5.10* | 5.50 | 5.90 |

Standard zinc plated, self colour and stainless options on request 可按要求提供标准镀锌、本色或不锈钢色选项

Easifit elevator bolts require a specialized ratchet. The ratchet has been designed to grip the hexagon tip, holding the bolt in place while the nut is tightened. The ratchet is available in either a standard hand model or in a pneumatic air version.

Easifit 提升机螺栓要求使用专用棘轮。在拧紧螺母时，此棘轮可夹紧六角端头，从而将螺栓固定在适当位置。可提供标准手持式或气动式的棘轮。

