



www.go4b.com

Light Duty Fastener


- For elevator belts up to 630 kN/m and up to 7.0mm max. thickness
- Vice grip between serrated jaws
- For longer joints use 2 fasteners of equal length per joint. e.g. 2 x 150mm Gripwell fasteners for a 300mm wide belt

轻型紧固件

- 适用于最大 630 kN/m 且最大厚度在 7.0mm 以内的提升机输送带
- 锯齿形钳牙之间的虎钳夹口
- 对于更长的接头，每个接头使用 2 个等长的紧固件，例如对于 300mm 宽的输送带，要使用 2 x 150mm Gripwell 紧固件



4B GRIPWELL

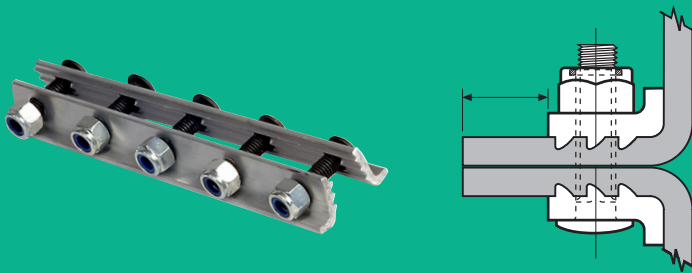

LIGHT DUTY 轻型

Belt Width 输送带宽度 (in)	(mm)	Actual Length 实际长度 (mm)	Bolt Holes 螺栓孔 (mm)	Ø (mm)	Centres 中心 (mm)
2	50	45	2	8.0	25
2½	65	57	2	8.0	33
3	75	70	2	8.0	43
3½	90	83	3	8.0	2x28
4	100	96	3	8.0	2x33
4½	115	109	3	8.0	2x42
5	125	122	4	8.0	3x32
5½	140	134	4	8.0	3x36
6	150	147	4	8.0	3x40
6½	165	160	5	8.0	4x33
7	175	172	5	8.0	4x36
8	200	198	6	8.0	5x34
9	225	223	6	8.0	5x40
10	250	248	7	8.0	6x37
11	275	273	7	8.0	6x41
12	300	299	8	8.0	7x39

FREE Elevator Design Service

免费提升机设计服务

