

POLYPENCO



www.go4b.com

FREE Engineering Design Service Contact 4B

免费工程设计服务，请联系 4B

Polypenco 'Nylatron' cast nylon buckets are designed for tough long-life solutions for industrial applications. Polypenco buckets can be used in new installations or in retro-fit situations and are available in 2 styles/ranges: NBA - for use in relatively narrow elevator legs DIN - for elevators designed around DIN NORM 15234

- **Heavy-duty construction** with thick bucket walls.
- **Impact, corrosion and abrasion resistant** for a long working life
- **Non-stick quality** reducing product build-up and reserving maximum elevator capacity
- **Suitable for both chain and bucket or belt and bucket applications**
- **Temperature resistant:** handles products up to max. 110°C

Polypenco 'Nylatron' 铸塑尼龙漏斗是坚固耐用、寿命持久的工业应用环境解决方案。Polypenco 漏斗可用于新设备或在改造情形中使用，且具有两种类型/范围：NBA - 适合在相对窄小的提升机支架中使用 DIN - 适用于按照 DIN 规范 15234 设计的提升机

- **重型结构**，斗壁较厚。
- **具有耐冲击性、耐腐蚀性和耐磨损性**，保证较长的工作寿命
- **具有不粘性特质**，可减少产品堆积并保持最大化的提升机容量
- **适用于链条和漏斗或者输送带和漏斗应用环境**
- **具有耐高温性**：可以处理最高 110°C 的产品

NBA & DIN 15234


Impact-wear-corrosion resistant cast Nylatron

NBA 和 DIN 15234

耐冲击-磨损-腐蚀性 Nylatron



INDUSTRIAL/STICKY/工业/粘性

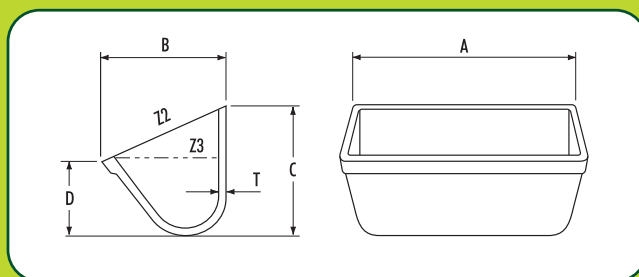

No. 编号	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	Kg	Capacity (Litres) 容量 (升)	
							Z2 (total) (总计)	Z3 (water) (水)
NBA 8	206	111	127	73	8	0.59	1.20	0.98
NBA 10	254	123	141	82	8	0.79	1.85	1.44
NBA 12	318	167	164	93	8	1.13	4.50	2.70
NBA 14	362	179	190	109	8	1.53	6.10	4.00
NBA 15	370	206	223	131	8	1.80	8.57	5.76
NBA 16	413	210	203	113	8	1.81	9.30	5.60
NBA 18	457	198	229	143	8	2.50	11.10	7.50
DIN 200/160	224	178	209	109	8	1.25	3.65	2.23
DIN 250/180	274	199	233	121	8	1.59	5.60	3.54
DIN 315/200	339	219	260	135	8	2.38	9.90	5.39
DIN 400/225	426	244	291	153	8	3.18	15.20	9.05
DIN 500/250	526	269	328	176	8	4.20	23.92	14.38
DIN 630/280	656	301	364	193	8	5.44	37.20	22.70

Bolt holes drilled to customer specification.

可按照客户规格为螺栓钻孔。

