

REF 70 BOLTS



www.go4b.com

4B REF 70™ BOLT

AVAILABLE IN STEEL / STAINLESS STEEL 304

- Steel – ISO grade 5.8 (exceeds DIN 15237)
- Concave head with 4 lugs on the underside to prevent rotation when tightening
- Hexagon nut and small flat washer included
- Available in Whitworth thread or metric thread
- Zinc plated (self colour on special request)
- Bolt torque rating dependent on bucket & belt size


4B REF 70™ 螺栓

可提供钢/不锈钢 304 材质

- 钢 ISO 等级 5.8 (高于 DIN 15237)
- 凹形封头底面带有 4 个突耳, 可防止在紧固时发生旋转
- 包含六角螺母和小平垫圈
- 可提供采用惠氏螺纹或公制螺纹的型号
- 镀锌 (根据特殊要求提供单色)
- 螺栓额定扭矩取决于料斗和输送带尺寸



REF 70™

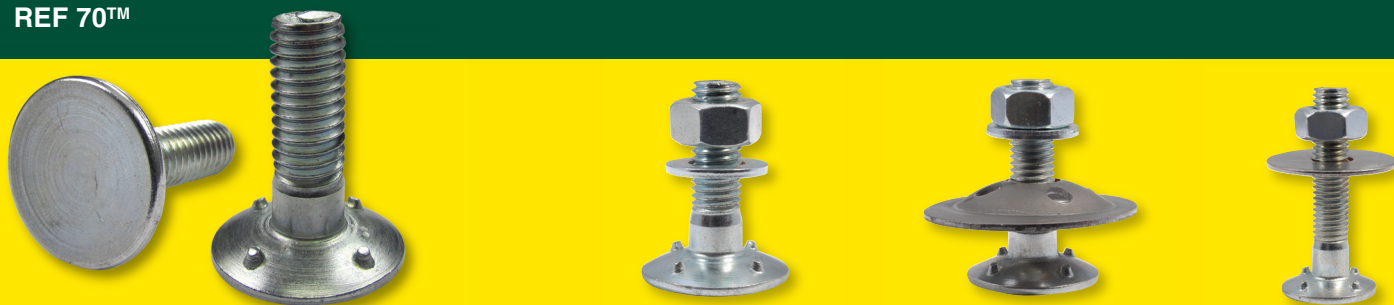

Ref. 参考	Head 螺栓头 (Ø mm)	Max. Bolt Torque 最大螺栓扭矩 (Nm)	BOLT LENGTH (measured from under the bolt head) 螺栓长度 (从螺栓头下方开始测量)								
			Kg/100								
			1/2"	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"
			12mm	20mm	25mm	30mm	40mm	45mm	50mm	55mm	65mm
1/4" BSW M6	17	5	1.04	1.18*	1.24*	1.48	1.56	-	-	-	-
5/16" BSW M8	23	10	-	2.08	2.38*	2.54*	2.90*	-	3.24	-	-
3/8" BSW M10	27	18	-	-	3.94	4.44*	4.80*	5.08*	5.36*	5.50	5.72
1/2" BSW M12	35	42	-	-	-	7.44	7.78	8.12	8.44	9.08	-

* Available in stainless steel

* 可提供不锈钢材质

4B Large Oval Washer 4B 大椭圆垫圈



AVAILABLE IN
STEEL/STAINLESS STEEL 304

- Use with Ref 70™ bolts in heavy duty applications
- Locates over 4 lugs on bolt head, increasing effective bolt head size and bolt holding
- Belt must be thick enough to absorb the washer and / or the bucket belt holes should be recessed
- Not recommended on pulley diameters of less than 20" (500mm)
- Fit the longest part of the oval across the belt width

可提供钢/
不锈钢 304 材质

- 可在重型应用环境中与 Ref 70™ 螺栓配套使用
- 固定在螺栓头上的 4 个突耳上, 增加有效的螺栓头尺寸和螺栓紧固性
- 输送带必须具有足够厚度, 以便为垫圈提供缓冲, 且/或应该对料斗输送带孔进行凹槽处理
- 不推荐用于直径小于 20" (500mm) 的皮带轮
- 将椭圆最长的部分横向安装在输送带上

Large Oval Washer 大椭圆垫圈

Ref.参考	Ø	(mm)	Kg/100
LOW1	1/4"	33/45	1.44
LOW2	5/16"	37/50	2.22
LOW3	3/8"	45/57	2.90
LOW4	1/2"	53/63	3.94

* Available in stainless steel * 可提供不锈钢材质