

# MF NYLATHANE™ BUCKET




Industrial Duty Tough  
Nylathane™ Buckets.


- > Solid construction: manufactured from Nylathane™ super-tough nylon
- > Solid throughout: no occlusions within the structure
- > Medium front for use in continuous discharge elevators
- > Corrosion and abrasion resistant
- > Service Temperature: Long term -40 to +110°C (with short peaks of 150°C)

## NYLATHANE



Industrial

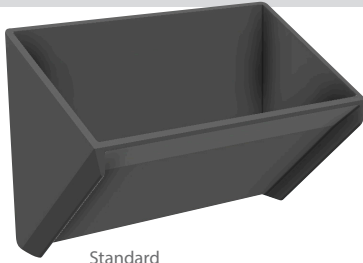

Standard



On special request\*



No.	Nominal Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	X°	Estimated Weight (kg)	Capacity (Litres) Z3 (water)
MF85	200 x 130	210	140	191	110	8.26	48	0.97	1.31
MF105	250 x 130	260	140	191	110	8.26	48	1.14	1.65
MF127	300 x 190	311	190	292	155	8.26	48	2.15	3.98
MF147	350 x 190	362	190	292	155	8.26	48	2.40	4.67
MF167	400 x 190	413	190	292	155	8.26	48	2.65	5.37
MF187	450 x 190	463	190	292	155	8.26	48	2.90	6.06
MF128	300 x 200	311	216	292	178	8.26	48	2.34	5.18
MF148	350 x 200	362	216	292	178	8.26	48	2.61	6.08
MF168	400 x 200	413	216	292	178	8.26	48	2.87	6.99
MF188	450 x 200	463	216	292	178	8.26	48	3.14	7.89
MF208	500 x 200	514	216	292	178	8.26	48	3.51	8.70
MF248	600 x 200	616	216	292	178	8.26	48	4.05	10.51

Mounting holes and venting to customer specification

\*Standard MF buckets are black; beige buckets available on special request

