


TYPE SPS SUPER STARCO™

The Super Starco™ bucket is the result of intensive research to achieve the maximum individual bucket capacity, while still maintaining the perfect fill and discharge characteristics of the original Starco bucket over a wide speed range.

- > Versatile bucket, available in many sizes
- > Increased Volume, with the same discharge characteristics as the Starco™ bucket
- > Less buckets required per metre
- > Less bolts and punching required
- > Reduced cost for belt & bucket installation

PRESSED SEAMLESS STEEL / STAINLESS STEEL

Agricultural & Industrial

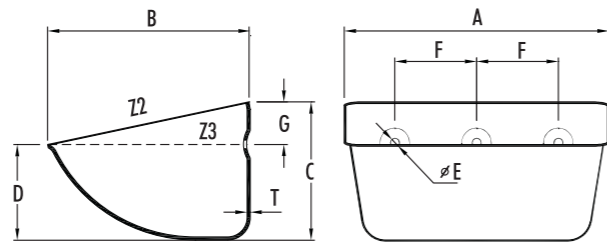

No.	A (mm)	B (mm)	C (mm)	D (mm)	T / KG						Capacity (Litres)		Recessed Holes			Max. Pcs/Mtr	
					1.0 (mm)	1.2 (mm)	1.5 (mm)	2.0 (mm)	2.5 (mm)	3.0 (mm)	Z2 (total)	Z3 (water)	No.	E (Ø mm)	F (mm)		G (mm)
SPS80-80	85	80	58	39	0.11						0.21	0.18	2	8.0	43	16	15.00
SPS100-90	106	89	66	45	0.12		0.18			0.40	0.33	0.25	2	8.5	50	20	14.00
SPS100-100	105	97	78	46	0.18						0.42	0.29	2	8.5	50	25	12.00
SPS120-100	125	105	77	53	0.22		0.33	0.44			0.58	0.44	2	8.0	67	25	12.00
SPS140-110	146	112	91	40			0.43				0.76	0.41	2	8.5	70	25	10.50
SPS130-120	138	120	90	62		0.30	0.38				0.83	0.65	2	8.5	70	25	10.50
SPS140-120	146	120	90	62			0.40			0.80	0.87	0.65	2	8.5	70/86*	25	10.50
SPS160-140	166	147	112	78			0.55	0.73		1.10	1.58	1.20	2	8.5	100	30	8.60
SPS180-140	187	147	112	78			0.61	0.81		1.22	1.75	1.35	2	8.5	100	30	8.60
SPS200-150	205	150	112	77			0.77	1.03		1.54	2.00	1.53	2	9.0	100/102*	32	8.60
SPS230-160/A	233	160	122	85			0.86	1.15		1.72	2.72	2.05	3	9.0	70	32	8.00
SPS230-160/B	233	160	122	85			0.86	1.15		1.72	2.72	2.05	2	10.5	120	32	8.00
SPS240-160/A	247	165	130	92				1.35		2.00	3.03	2.37	3	10.5	70/77*	35	7.40
SPS240-160/B	247	165	130	92				1.35		2.00	3.03	2.37	2	10.5	140	35	7.40
SPS240-160/C	247	165	130	92				1.35		2.00	3.03	2.37	2	10.5	120	35	7.40
SPS260-165	262	165	130	92				1.38		2.10	3.28	2.55	3	10.5	77/80*	35	7.40
SPS280-165	289	167	132	93				1.55		2.32	3.78	2.80	3	10.5	80	38	7.40
SPS300-165/A	308	165	135	94				1.65	2.08	2.50	3.88	2.90	3	9.0	100/104*	36	7.20
SPS300-165/B	308	165	135	94				1.65	2.08	2.50	3.88	2.90	3	11.0	100	36	7.20
SPS330-165	340	165	135	97				1.90	2.37	2.85	4.40	3.50	3	11.0	110/120*	38	7.20
SPS350-165/A	360	165	135	94				2.12		3.20	4.50	3.65	4	9.0	90	38	7.20
SPS350-165/B	360	165	135	94				2.12		3.20	4.50	3.65	3	11.0	120	38	7.20

TYPE SPS SUPER STARCO™



No.	A (mm)	B (mm)	C (mm)	D (mm)	T / KG						Capacity (Litres)		Recessed Holes			Max. Pcs/Mtr					
					1.0 (mm)	1.2 (mm)	1.5 (mm)	2.0 (mm)	2.5 (mm)	3.0 (mm)	Z2 (total)	Z3 (water)	No.	E (Ø mm)	F (mm)		G (mm)				
SPS230-170	235	170	132	93								1.40		3.09	2.40	2	11.0	120	35	7.00	
SPS200-180	204	182	140	98								1.28		2.84	2.17	2	11.0	110	44	7.00	
SPS260-180	270	188	140	96								1.58		4.10	3.20	3	11.0	80	45	7.00	
SPS280-180	290	185	140	97								1.70	2.55	4.40	3.30	3	11.0	80	38	7.00	
SPS300-180/A	308	182	140	95								1.80	2.70	4.50	3.50	3	9.0	100/104*	36	7.00	
SPS300-180/B	308	182	140	95								1.80	2.70	4.50	3.50	3	11.0	100	36	7.00	
SPS330-180	340	182	140	98								2.00		5.20	4.00	3	11.0	110/120*	38	7.00	
SPS350-180/A	362	182	140	98								2.10	3.15	5.40	4.20	4	11.0	90	38	7.00	
SPS350-180/B	362	182	140	98								2.10	3.15	5.40	4.20	3	11.0	120	38	7.00	
SPS370-180	385	195	140	95								2.24	2.80	6.40	4.90	4	11.0	90	38	7.00	
SPS250-215	257	215	162	113								1.86		5.30	4.10	3	11.0	85	49	5.88	
SPS280-215	294	215	163	114								2.18	2.86	6.04	4.70	3	11.0	80	50	5.88	
SPS300-215	310	220	163	112								2.32	2.90	6.70	5.20	3	11.0	100	50	5.88	
SPS330-215	340	215	163	112									2.97	3.56	7.20	5.65	3	11.0	120	50	5.88
SPS350-215	362	215	163	112									3.23	3.87	7.60	5.86	3	11.0	120	50	5.88
SPS370-215	381	215	163	112									3.32	4.00	8.10	6.30	4	11.0	90	50	5.88
SPS440-215	450	225	165	113									3.92	4.68	9.83	7.44	4	11.0	110	50	5.88
SPS450-215	464	215	163	113									4.00	4.80	9.95	7.90	5	11.0	88/90*	50	5.88
SPS470-215	480	225	165	113									4.14	4.95	10.56	8.06	4	11.0	120	50	5.88
SPS500-215	515	215	163	113									4.28	5.14	11.25	8.80	5	11.0	100	50	5.88
SPS630-215	640	220	164	113										7.40	14.29	10.92	7	11.0	90	50	5.88

Special holes/thicknesses/wearbands - available on request
Wear band size: 3.0mm on 1 or 3 sides on request / * Slotted holes to fit alternate hole centres

FOR STAINLESS STEEL, SEE PRICE LIST FOR THICKNESS OPTIONS