


4B AD DIN 15234

DIN 15234 'Nyrim' Super Tough Industrial Duty Elevator Bucket High capacity.

- > **Solid construction:** manufactured from 'Nyrim', a high-grade nylon/rubber reaction moulding
- > **Maximum impact, corrosion and abrasion resistant**
- > **Long bucket life**
- > **Suitable for use with elevator belting and chain:** The reduced weight of the bucket enables extended chain life
- > **Ideal for industrial applications, such as aggregates, cement, gypsum, coal, sand, etc**

DIN 15234 IN 'NYRIM'

Industrial/Sticky

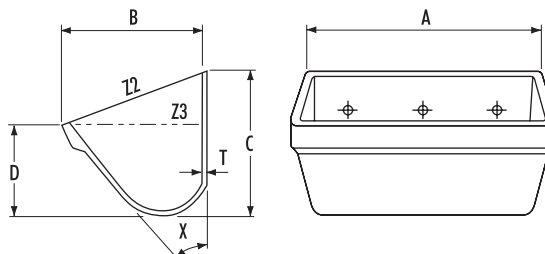

No.	Nominal Size (mm)	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	X°	Capacity (Litres)		
								(kg)	Z2 (total)	Z3 (water)
AD250	250 x 180	273	199	239	124	8	40	1.44	5.87	3.56
AD300	300 x 200	361	202	215	111	14	43	1.70	6.75	4.135
AD400	400 x 224	424	247	286	156	11	39	2.75	14.33	9.00
AD500	500 x 250	524	274	321	174	12	39	3.80	23.20	15.00
AD630	630 x 280	654	306	363	196	12	39	6.80	36.00	23.40

Bolt holes drilled to customer specification

